

LED Full Cutoff Wall Pack



SSL-WP3T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-60W)	2,575-6,300lm

Features

- Modern Design Compact Wallpack with Glass diffuser for long life.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +40 °C.
- 2200K and wattage (25W - 40W-60W)
- Efficacy of ≥ 120 lm/W with 120-347V LED Auto-Sensing driver



Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover

Mounting:

Surface Mounting

Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ +40 °C

LED:


2200K, Efficacy of ≥ 120 lm/w.

Controls:

Compatible with 0-10V Dimming, Photocell Sensor.




Dimensional Drawing

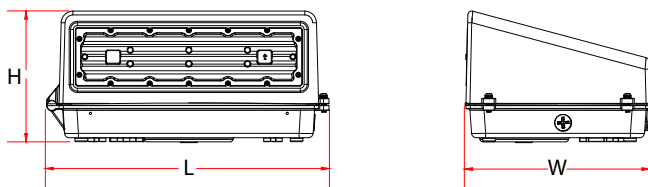

L	W	H
14.17"	9.29"	6.54"

Polar Candela

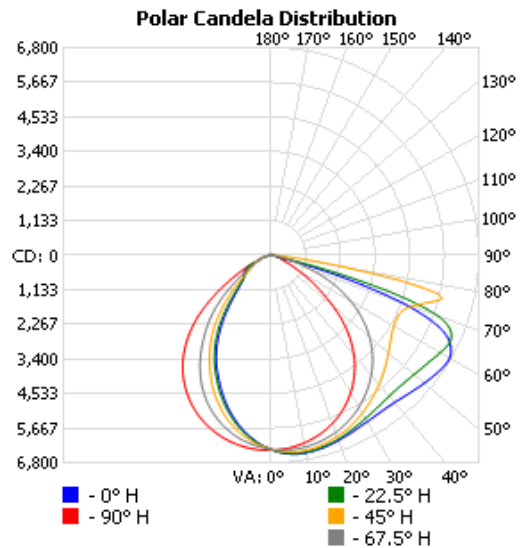

Applications



Malls



Hotels



Industry



Office Complex

LED Full Cutoff Wall Pack



SSL-WP3T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-60W)	2,575-6,300lm

Ordering Information Example: SSL-WP3T/60M/MW/22/120-347V/D/PC/BK

Family Name	Fixture Type	Wattage	CCT	Voltage	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP3T (LED full cutoff wall pack)	60M/MW (Max. 60W, Selectable Wattage)	22 (2200K)	120-347V	D (Dimmable)	PC (Default)	BK (Black)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680377	SSL-WP3T/60M/MW/22/120-347V/D/PC/BK	60-40-25	120-347V	50,000	6300-4200-2575	2200	≥80	Yes	14.17"× 9.29"× 6.54"	1